

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 February 2003 (06.02.2003)

PCT

(10) International Publication Number
WO 03/009891 A1

(51) International Patent Classification⁷: **A61M 5/50**

(21) International Application Number: PCT/AU01/01391

(22) International Filing Date: 30 October 2001 (30.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PR 6575 26 July 2001 (26.07.2001) AU

(71) Applicant (*for all designated States except US*): **AFRA DESIGN PTY LIMITED** [AU/AU]; 11 Patterson Street, Tahmoor, New South Wales 2573 (AU).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **POPOVSKY, Frank** [AU/AU]; 11 Patterson Street, Tahmoor, New South Wales 2573 (AU).

(74) Agent: **PIZZEYS**; Suite 6, Level 2, Woden Plaza Offices, Woden Plaza, Woden, Australian Capital Territory 2606 (AU).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SINGLE-USE SYRINGE

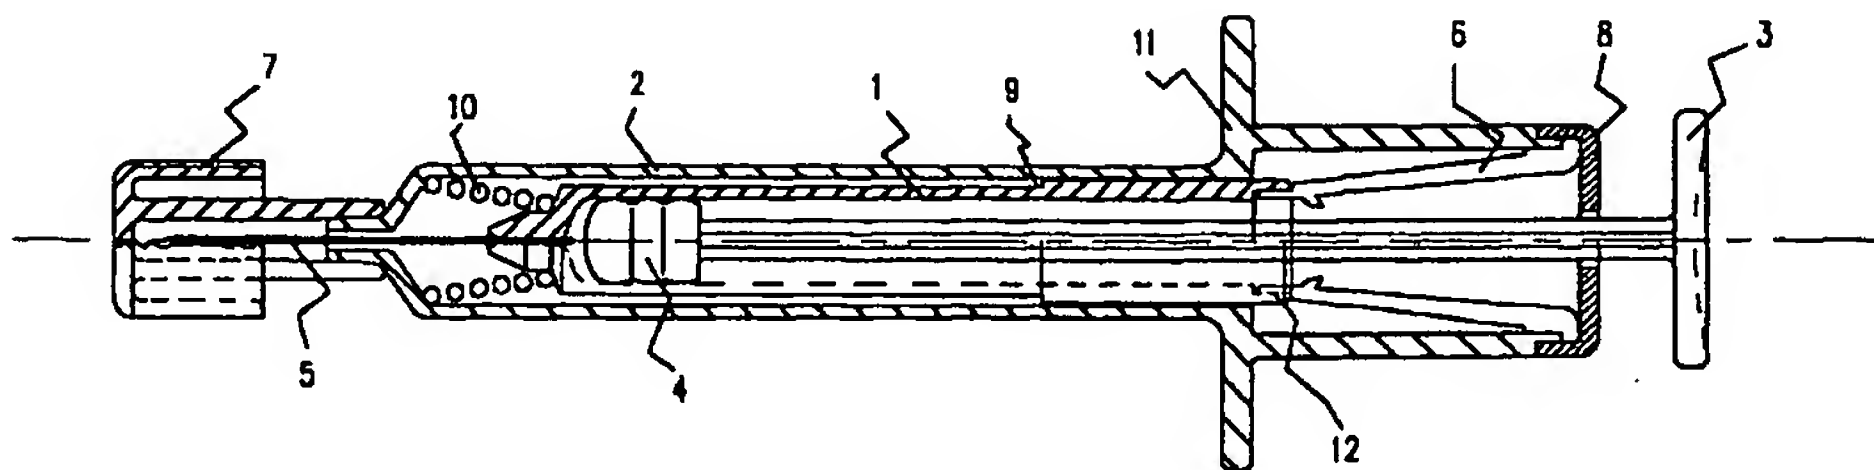

(57) Abstract: A single-use syringe includes a shield (2), a barrel (1) mounted for axial movement within the shield and being biased to a rearward position by resilient biasing means (10), and a plunger assembly (3) mounted for axial movement within the barrel. A resilient locking member (6) initially prevents the barrel from moving rearwardly. When fluid is expressed from the barrel, the barrel moves forward thereby disabling rearward movement prevention means (15) and enabling forward movement prevention means (14) such that the barrel can move rearwardly and is locked in the rearward position to prevent repeated use.

WO 03/009891 A1

SINGLE-USE SYRINGE**FIELD OF THE INVENTION**

- 5 The invention relates to a single-use syringe.

BACKGROUND ART

10 It is known to employ a single-use syringe to reduce the risk of needle-sharing amongst drug addicts, and to reduce the risk of needle-stick injuries amongst health-care workers and the like. Many different designs of single-use syringes have been suggested. The present invention relates to an alternative design which offers substantial advantages over known designs.

15 **SUMMARY OF INVENTION**

The present invention provides a single-use syringe according to the following claims. Preferred features of the invention will be apparent from the dependant claims and from the following description of the preferred embodiment.

20

BRIEF DESCRIPTION OF DRAWINGS

The invention will now be described in a non-limiting manner with respect to a preferred embodiment in which:-

25

FIGS 1 to 3 are sequential, longitudinal, sectional and cutaway views of a preferred embodiment of a single-use syringe according to the present invention;

- 5 FIGS 4 and 5 are expanded views of FIGS 2 and 3, respectively, showing detail of the resilient locking member; and

FIG 6 is a perspective view of the resilient locking member.

10 **DETAILED DESCRIPTION OF PREFERRED EMBODIMENT**

With reference to FIG 1 there is illustrated a single-use syringe comprising a shield 2, a barrel 1 mounted for axial reciprocation within the shield 2, and a plunger 4 mounted for axial reciprocation within the barrel 1.

15

Resilient biasing means 10, in the form of a compression spring, is disposed between the interior of the forward end of shield 2 and the exterior of the forward end of barrel 1 such that the resilient biasing means 10 tends to bias the barrel 1 rearwardly with respect to the shield 2.

20

As is conventional, a needle 5 is mounted at the forward end of barrel 1 and, prior to use, the needle is covered by a cap 7.

Within a cavity defined at the rearward end of shield 2 is a resilient locking
25 member 6, the shape of which will be best understood with reference to FIG 6.

Resilient locking member **6** consists of a pair of circumferentially-opposed, forwardly-extending resilient fingers which extend from a ring-shaped base which is mounted relative to the shield **2**.

- 5 Each of the forwardly-extending resilient fingers terminates in a rearward movement prevention means **15** and a forward movement prevention means **14** in the form of an inwardly-directed hook.

With further reference to FIG 1, the ring-shaped base of the resilient locking
10 member **6** is mounted relative to shield **2** and is located between the body of the shield **2** and a closure cap **8** for the shield. The closure cap **8** is provided to facilitate assembly of the syringe which will be described further hereunder. After assembly, closure cap **8** is ultrasonically or thermo welded to shield **2**.

- 15 The rearward end of the barrel **1** includes a rearwardly-facing shoulder **12** disposed on the interior of the barrel **1** which may be engaged by the rearward movement prevention means **15**. Alternatively, the rearward prevention means **15** includes a forwardly-facing shoulder which engages the rearmost extent of the barrel **1**. As illustrated in FIG 4, the engagement occurs between the
20 forwardly-facing shoulder of the rearward movement prevention means **15** and the rearmost extent of the barrel **1**.

The generally cylindrical exterior of the barrel **1** includes a forwardly-facing shoulder **9** which can be engaged by the forward movement prevention means
25 **14** as will be described in more detail hereunder.

With further reference to FIG 1 and FIG 4, it will be noted that the resilient
biasing means 10 initially fails to urge the barrel 1 in a rearward direction with
respect to shield 2 by virtue of the presence of rearward movement prevention
5 means 15 engaging the rear of the barrel 1. This may be best understood with
reference to the detailed illustration in FIG 4.

In use, the cap 7 is first removed to expose needle 5 and thereafter the fluid is
aspirated into the interior of the barrel 1 as shown in FIG 2 by withdrawing the
10 plunger assembly 3, and more particularly the rubber plunger 4, relative to the
barrel 1. It will be understood that rearward movement of the plunger assembly
3, and particularly the rubber plunger 4, within the barrel 1 causes a frictional
force between the plunger 4 and the interior of barrel 1 which tends to urge the
barrel 1 in the rearward direction with respect to shield 2. However, rearward
15 movement of the barrel 1 with respect to shield 2 continues to be prevented by
the engagement of rearward movement prevention means 15 with the rear of
the barrel 1 as best shown in FIG 4.

At this point it is worth noting that, whilst the preferred embodiment is described
20 with reference to a syringe which is provided to the user without a fluid already
present in the interior of the barrel 1, it is possible that the syringe could be
provided to the user in the state shown in FIG 2. Put differently, the syringe
could be provided in a pre-filled configuration as shown in FIG 2.

With further reference to FIG 2 and FIG 4, it will be appreciated that as soon as the barrel 1 moves forwardly with respect to shield 2 thereby compressing resilient biasing means 10, the rearward movement prevention means 15 will disengage from the rear of the barrel 1 and it is important to note at this stage
5 that the forwardly-projecting fingers of the resilient locking member 6 are resilient and tend to spring outwardly so that, as the barrel 1 subsequently travels rearwardly with respect to shield 2, the rearward movement prevention means 15 are not re-engaged with the rear of the barrel 1. Put differently, with comparative reference between FIG 2 and FIG 3 (or with comparative reference
10 to FIG 4 and FIG 5), the forwardly-projecting fingers of the resilient locking member 6 initially adopt a partially frusto-conical configuration as shown in FIGS 2 and 4. However, when the barrel 1 moves forward and the fingers are disengaged from the rear of barrel 1, they spring outwardly to the partially cylindrical configuration shown in FIGS 3 and 5.

15

It will be understood that the act of expressing fluid from the interior of the barrel 1 causes the barrel 1 to move forwardly with respect to shield 2 thereby compressing resilient biasing means 10. In this regard, it will be noted with reference to FIG 1 or FIG 2 that the syringe is provided to the user with the
20 barrel not quite in the fully forward position, but closely adjacent thereto so that only a small forward movement of the barrel 1 occurs during initiation of the injection.

The act of injecting the fluid into the patient (ie the squeezing together of the thumb-engaging portion of the plunger assembly 3 and finger-engaging portions 11 of the shield 2) causes barrel 1 to move to the fully forward position which results in the disengagement and disablement of the rearward movement prevention means 15. As soon as the injection is completed and the squeezing force applied by the user to the thumb-engaging portion of the plunger assembly 3 and finger-engaging portions 11 on the shield 2 is complete, the resilient biasing means 10 urges the barrel 1 rearwardly with respect to the shield 2 to the fully rearward configuration shown in FIG 3 whereat it is locked by the forward movement prevention means 14 as will now be described.

With reference to FIGS 3 and 5, it will be noted that the forwardly-projecting fingers of the resilient locking member 6, and more particularly the forward movement prevention means 14, have engaged the forward-facing shoulder 9 which is formed on the exterior of the barrel 1. This inter-engagement between the forward movement prevention means 14 and forward-facing shoulder 9 prevents subsequent forward movement of the barrel 1 relative to the shield 2 and hence prevents a subsequent exposure of the needle 5 and repeat usage of the single-use syringe.

20

It will be understood that the resilient fingers of the resilient locking member 6 adopt a neutral or natural position when they are not engaged with either the rear of the barrel 1 or the forwardly-facing shoulder 9 on the exterior of the barrel. This natural position will be one in which the fingers are sufficiently spread apart so that the rearward movement prevention means 15 do not

25

engage the rear of the barrel 1, but not so spread apart such that the forward movement prevention means 14 fail to engage the forwardly-facing shoulder 9 on the exterior of the barrel 1.

- 5 In summary, squeezing together of the thumb-engaging portion of the plunger assembly 3 and finger-engaging portions 11 during the act of injection causes a small forward movement of the barrel 1 relative to the shield 2 which disengages the fingers of the resilient locking member 6 from the rear of the barrel 1. After completion of the injection, the barrel 1 is biased to the fully
10 rearward position by the compression spring whereat the needle 5 is shielded and whereat the barrel 1 is locked by the fingers of the resilient locking member 6, and particularly the forward movement prevention means 14, engaging the forwardly-facing shoulder 9 on the exterior of the barrel 1.
- 15 Manufacture of the single-use syringe according to the present invention is very simple in that first the resilient biasing means 10 and then the needle 5, barrel 1 and plunger assembly 3 are inserted into the shield 2 from the rear thereof. Thereafter, the resilient locking member 6 is located as shown in FIG 1 with the rearward movement prevention means 15 engaging the rear of the barrel 1 as
20 shown. Finally, the closure cap 8 is ultrasonically or thermo welded to the shield 2.

It will be appreciated that the configuration of the preferred embodiment is particularly advantageous in that the forward movement of the barrel relative to
25 the shield which occurs during injection simultaneously disables the rearward movement prevention means 15 and enables the forward movement prevention means 14, each of which is integrally located on the forwardly-projecting fingers

of the resilient locking member 6. As soon as the injection is complete, the resilient biasing means 10 urges the barrel rearwardly with respect to the shield to a position whereat it is locked to prevent subsequent use.

- 5 It is of course important to ensure that forward movement of the barrel 1 relative to the shield 2 does not occur inadvertently prior to the injection taking place. For example, it is important that forward movement of the barrel 1 relative to the shield 2 does not occur during transportation, or preliminary handling of the syringe. For this purpose, a removable spacer may be inserted between the
- 10 rear of the closure cap 8 and the thumb engaging portion of the plunger assembly 3. Alternatively, the plunger rod may be shortened such that the thumb-engaging portion of the plunger assembly 3 abuts the rear of the closure cap 8 when in the configuration shown in FIG 1.
- 15 It will be appreciated that the present invention has significant ergonomic advantages in that the operation of the syringe is entirely conventional and no extraneous operations are required to lock the device to prevent subsequent use.

CLAIMS

1. A single-use syringe including:-

a shield;

5 a barrel having a needle at its forward end, the barrel being mounted for axial movement within the shield between a forward position whereat the needle is exposed and a rearward position whereat the needle is shielded;

resilient biasing means for biasing the barrel towards the rearward position; and

10 characterised in that:-

rearward movement prevention means initially prevent rearward movement of the barrel to said rearward position, and

forward movement of the barrel disables said rearward movement prevention means such that, subsequent to said forward movement, said

15 resilient biasing means can bias the barrel to said rearward position whereat forward movement prevention means prevent subsequent forward movement of the barrel.

2. A single-use syringe as claimed in claim 1, wherein said forward

20 movement of the barrel simultaneously enables said forward movement prevention means.

3. A single-use syringe including:-

a shield;

5 a barrel having a needle at its forward end, the barrel being mounted for axial movement within the shield between a forward position whereat the needle is exposed and a rearward position whereat the needle is shielded;

resilient biasing means for biasing the barrel towards the rearward position; and

10 characterised in that:-

forward movement of the barrel enables forward movement prevention means and, subsequent to said forward movement, said resilient biasing means can bias the barrel to said rearward position whereat said forward movement prevention means prevent subsequent forward movement of the barrel.

15

4. A single-use syringe as claimed in claim 3, wherein said forward movement of the barrel simultaneously disables rearward movement prevention means.

20

25

5. A single-use syringe as claimed in claim 2 or 4, wherein said rearward movement prevention means and said forward movement prevention means are integrally located on a locking member associated with the shield.

- 5 6. A single-use syringe as claimed in claim 5, wherein the locking member is resilient and depends from the shield and initially engages the barrel and prevents rearward movement of the barrel and, subsequent to said forward movement of the barrel, the resilient locking member is adapted to engage the barrel and prevent forward movement of the barrel.

10

7. A single-use syringe as claimed in claim 6, wherein the resilient locking member is comprised of a plurality of circumferentially spaced, forwardly-directed fingers.


- 15 8. A single-use syringe as claimed in claim 7, wherein the resilient locking member is bi-furcated and includes a pair of circumferentially-opposed, forwardly-directed fingers.

20

25

9. A single-use syringe as claimed in claim 1 or 3, wherein the syringe includes a plunger assembly mounted for axial reciprocation within the barrel, the plunger assembly including a thumb-engaging portion and the shield including a finger-engaging portion, and wherein squeezing together of the
5 thumb-engaging portion and finger-engaging portion to express fluid from the interior of the barrel causes said forward movement.

10. A single-use syringe as claimed in claim 1 or 3, wherein the syringe is supplied with the barrel adjacent said fully forward position such that the
10 magnitude of said initial forward movement is small relative to the subsequent rearward movement under the influence of the resilient biasing means.

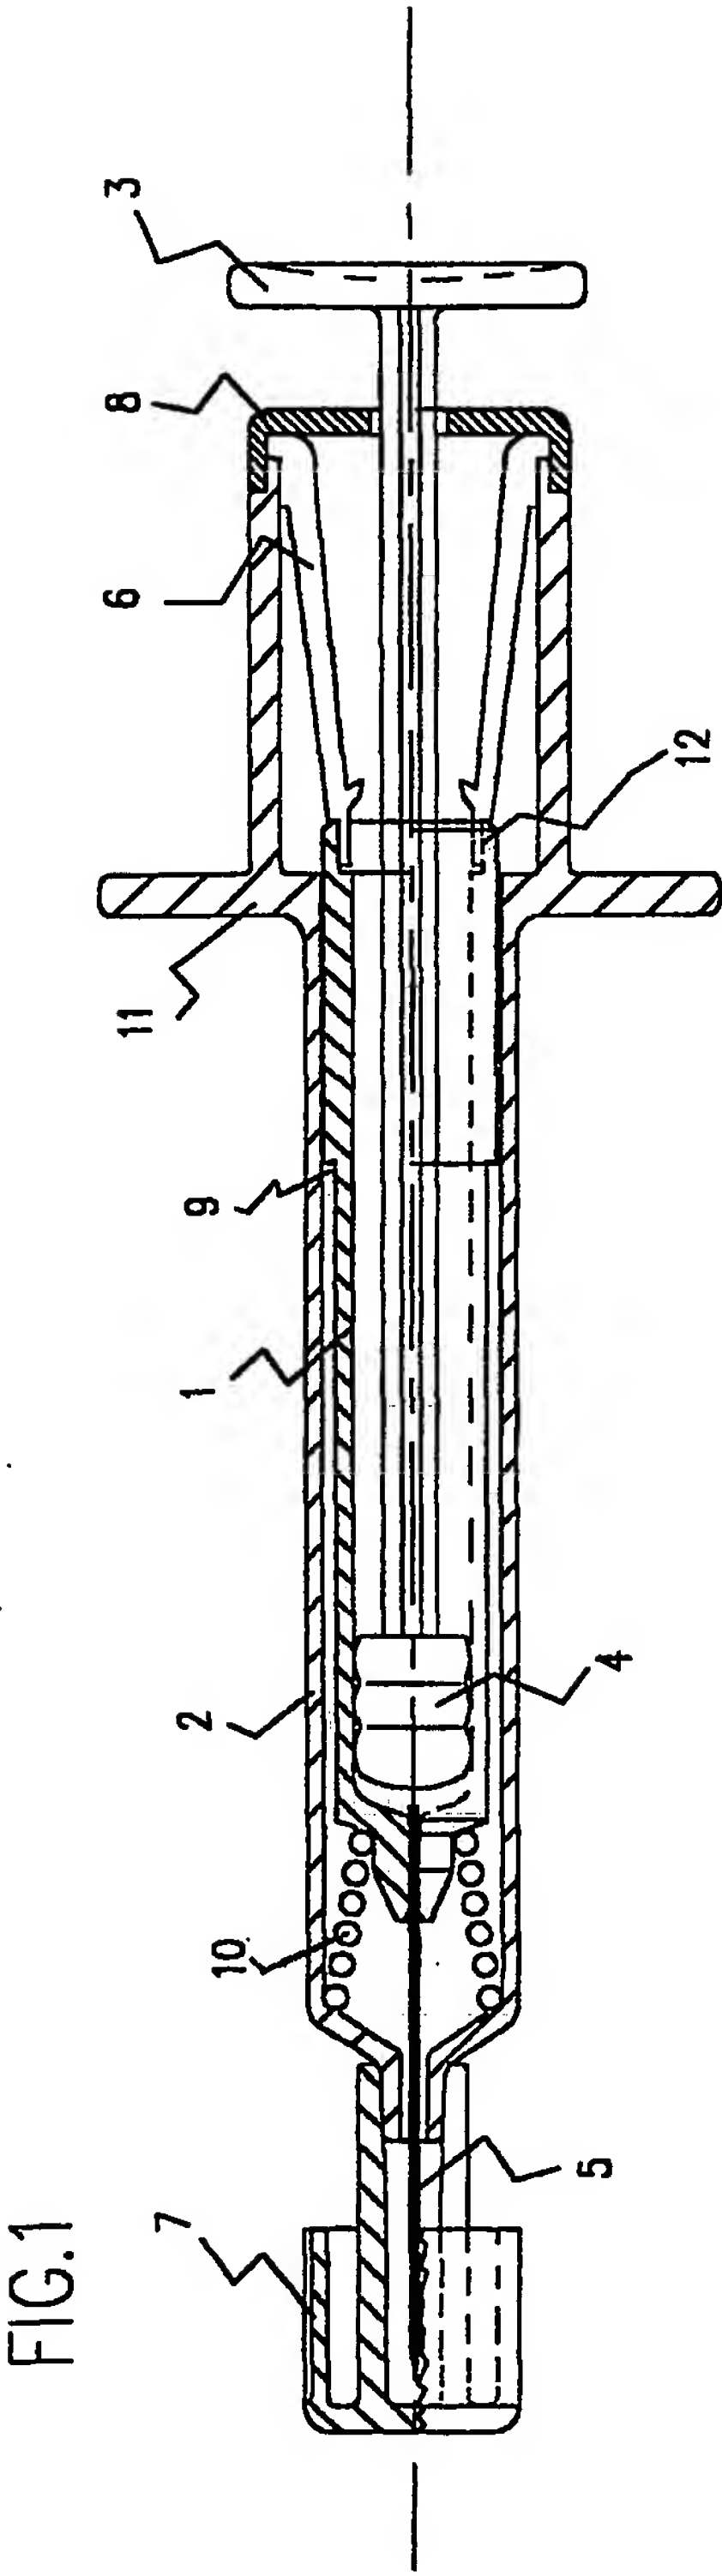

2/3

FIG.2

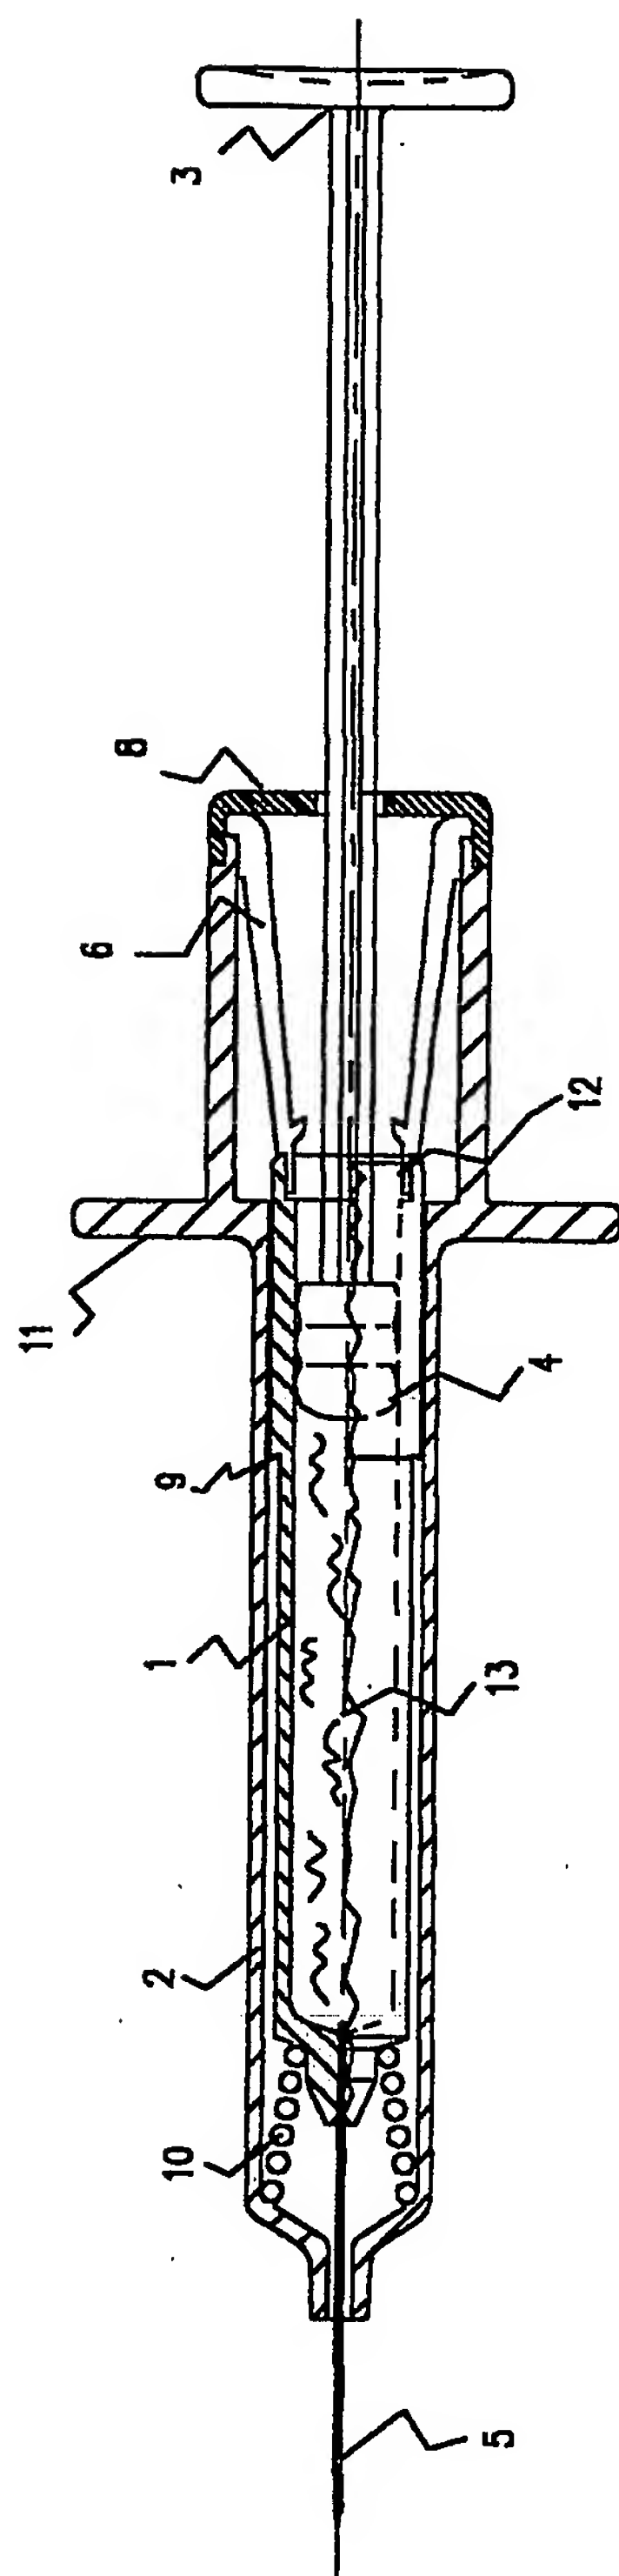


FIG.6

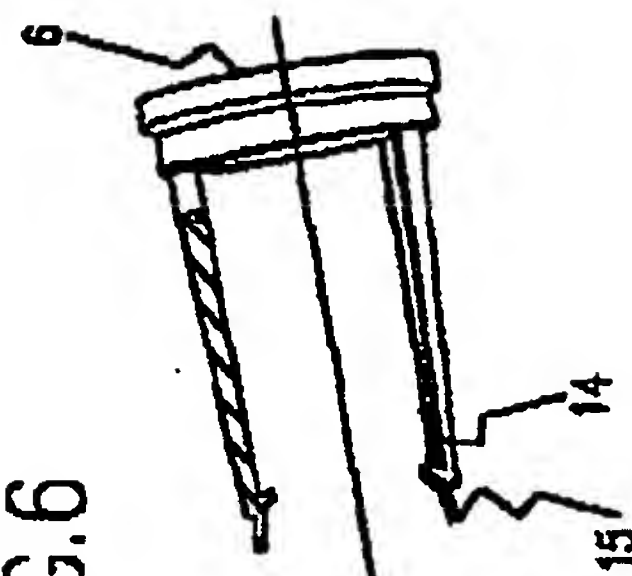


FIG.3

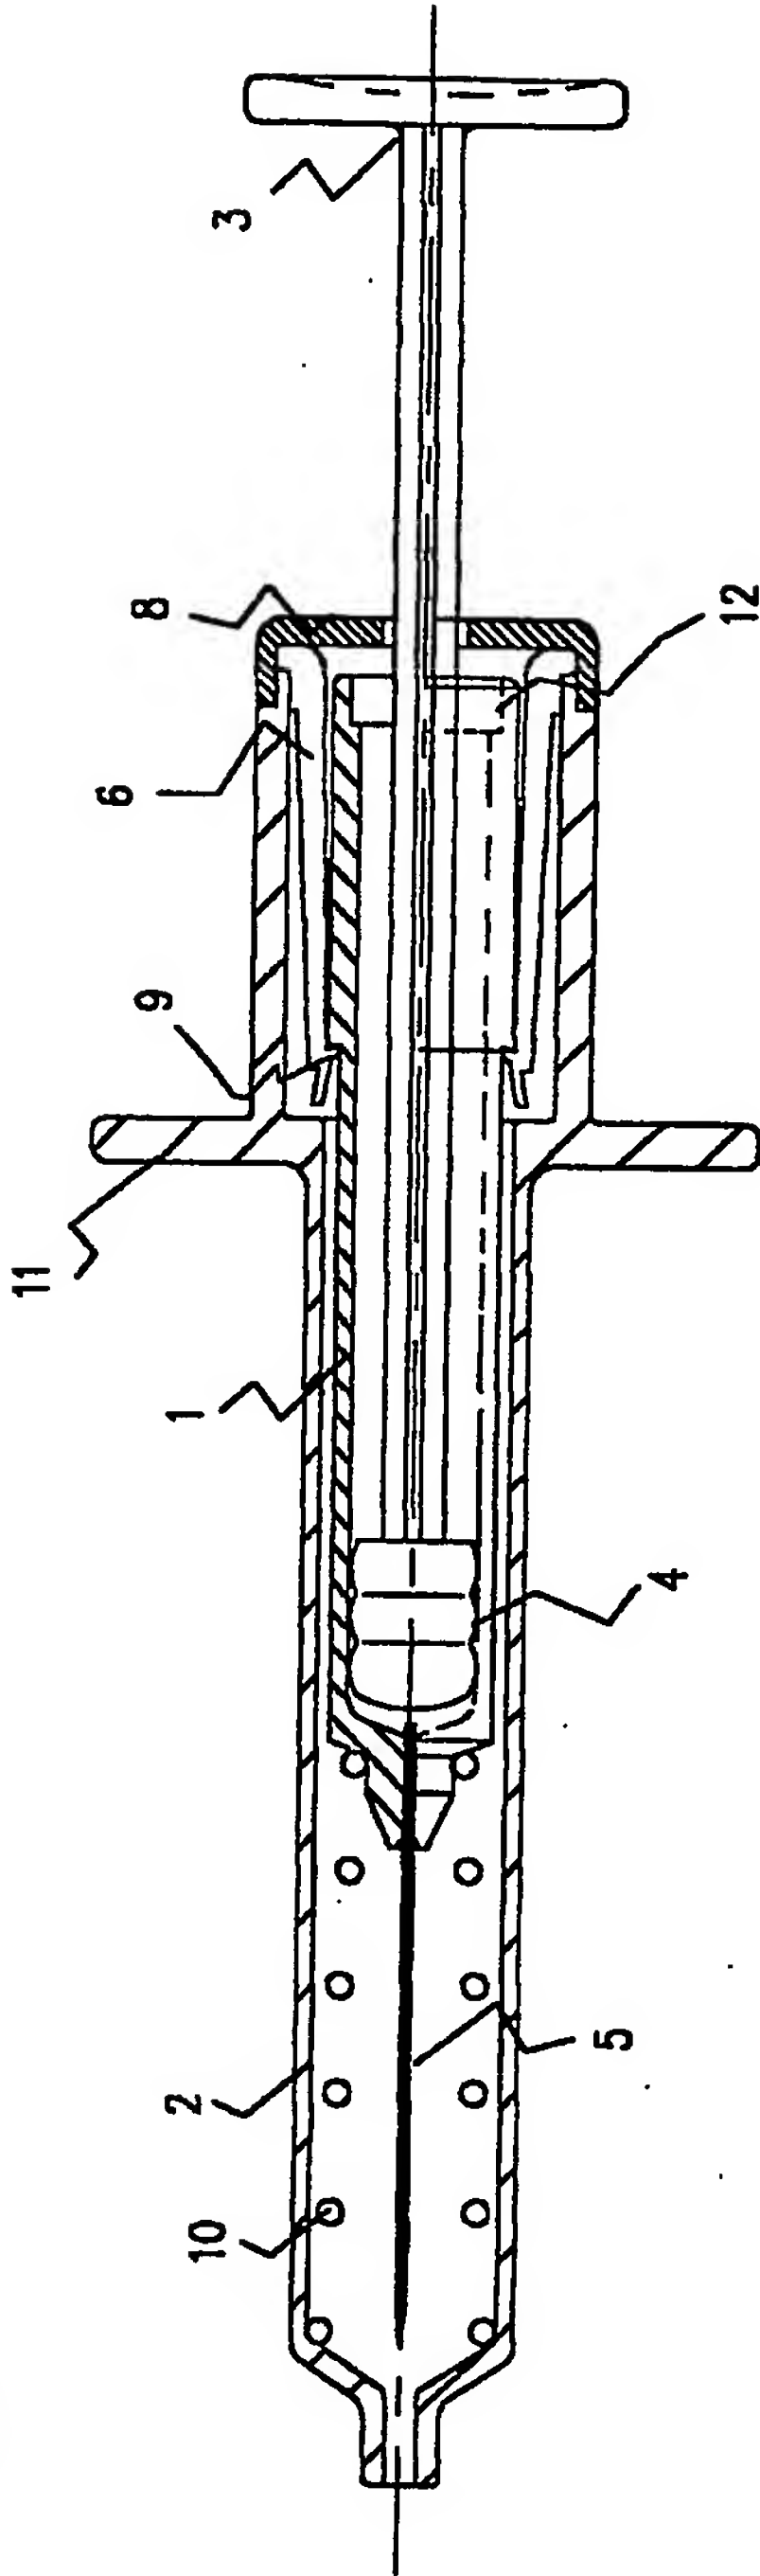


FIG.4


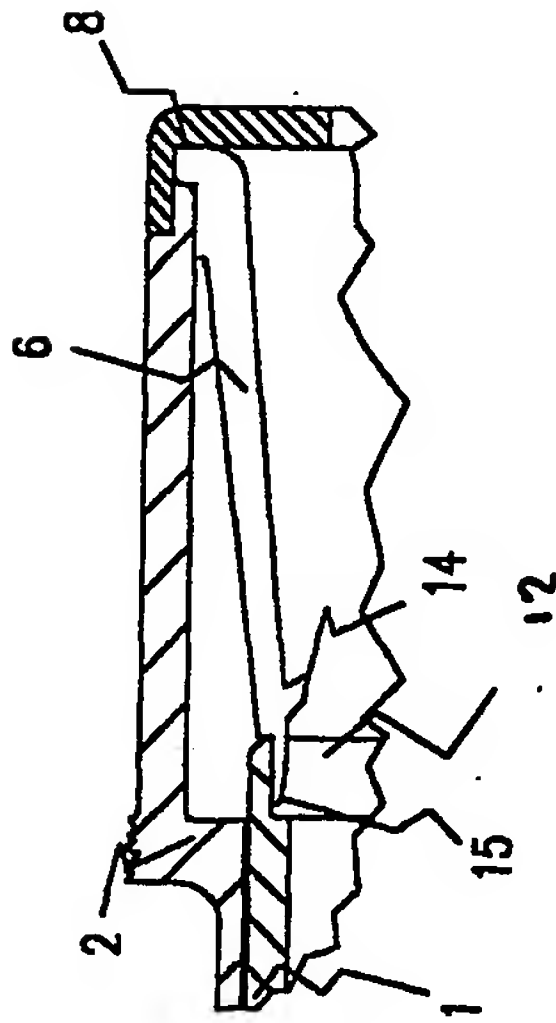


FIG.5.

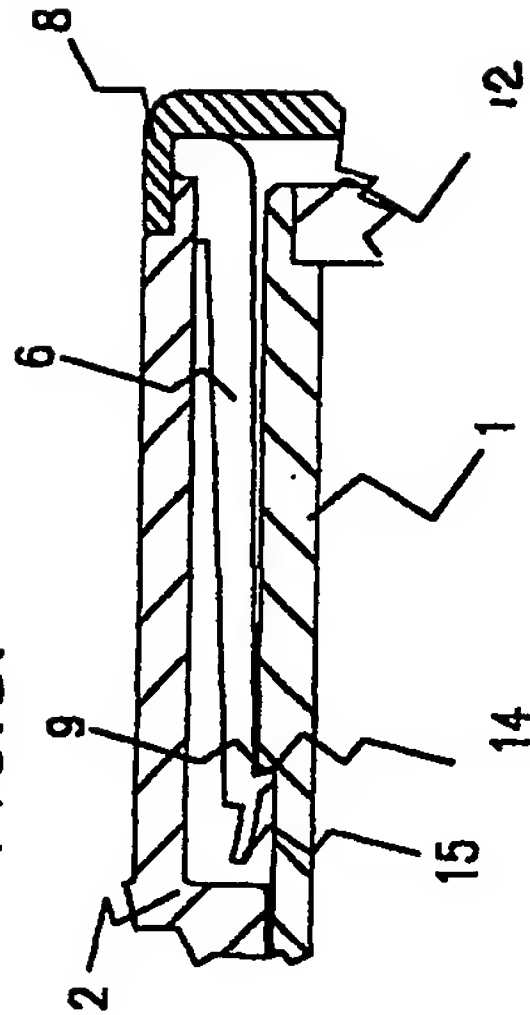

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU01/01391

A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl. 7: A61M 5/50

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DWPI and keywords: syringe safety shield sleeve bias prevent and similar terms

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 94/13337 A1 (CASTAGNA) 23 June 1994 whole document	1-5,9,10
X	EP 966983 A1 (BECTON, DICKINSON and COMPANY) 29 December 1999 column 8 lines 5-41	1,9,10
P,X	WO 01/54758 A1 (AFRA DESIGN PTY LIMITED) 2 August 2001 page 7 line 10 - page 9 line 10 figures 4-6	3,9

☐

Further documents are listed in the continuation of Box C

☒

See patent family annex

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

2 January 2002

Date of mailing of the international search report - 7 JAN 2002

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE
PO BOX 200, WODEN ACT 2606, AUSTRALIA
E-mail address: pct@ipaustalia.gov.au
Facsimile No. (02) 6285 3929

Authorized officer

A.R. HENDRICKSON
Telephone No : (02) 6283 2415

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/AU01/01391

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member	
WO	94/13337	US	5411487
EP	966983	JP	11-319090
		US	6319233
WO	01/54758	AU	68103/00
END OF ANNEX			